L'AIR Quik-Base®

WALL BASE MOULDING

06 65 00 - Plastic Trims

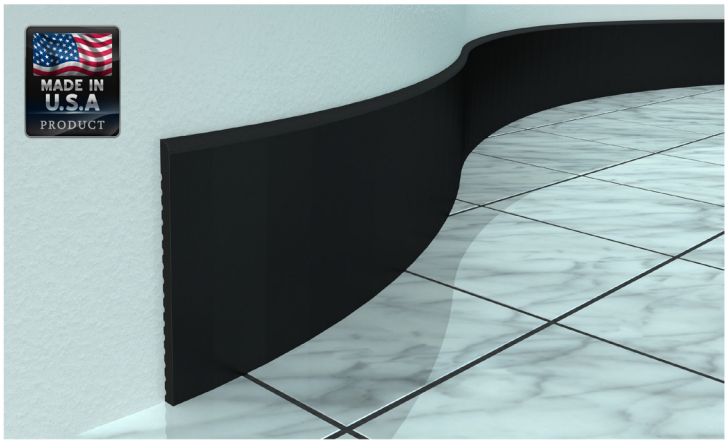

Made of durable and time-tested PVC, Quik-Base trim offers a modern, high-performance solution, for both commercial & residential applications. Quik-base trim is offered in two standard profiles, thicknesses and adds a sophisticated and clean aesthetic in a variety of settings.

QUIK-BASE IS BEAUTIFUL

Avant & Contempo trim features a smooth, durable matte finish. Furnished in four standard colors, Quik Base trims will also readily accept paint.

QUIK-BASE IS WORKABLE

Cutting Avant & Contempo is easy, leaving no residue using standard tools. Installing onto straight, curved walls or standard tools is fast and easy, requiring less labor time.

QUIK-BASE IS DURABLE

With Avant and Contempo you can feel confident. There's no rotting, cupping, warping, splits, or twisting. It's moisture, insect, impact & heat resistant, doesn't require paint & is suitable for damp or exterior applications.

QUIK-BASE IS UNIFORM

With consistent density, color & edges, Avant & Contempo trim provides uniform aesthetic. Manufacturing tolerances are exact and uniformity results in minimal waste during installation.

Stock colors below. Custom color matching available.

Black | Beige | Dk. Gray | Lt. Gray

For more information, samples and pricing call 1.844.243.8574 or visit www.lairfloors.com

Avant & Contempo Product Specifications

Description:

A homogeneous composition of 100% foamed-polyvinyl chloride (PVC), high quality additives, and colorants - produced in a smooth, durable matte finish. Quik-Base mouldings feature a consistent density, impact resistance and color; providing a uniform and contemporary aesthetic.

Physical Characteristics:

1/4" thick x 4" high x 8'-0" long
3/4" thick x 4" high x 8'-0" long
Inside & outside corners available

Performance & Technical Data - 1/4"

PROPERTY	VALUE	ASTM
Density	0.70	D 792
Water Absorption	0.3	D 570
Tensile Strength	3000	D 638
Tensile Modulus	232,000	D 638
Flexural Strength	—	D 790
Flexural Modulus	—	D 790
Garner Impact	—	D 4228
Izod Impact Strength	0.53	D 256
Charpy Impact	8.1	D 256
Heat Deflection Temp	151	D 648
Coefficient of Expansion	4.0×10^{-5}	D 696
Thermal Conductivity	0.084	C 177
Burning Rate	Failed to ignite	D 635
Flame Spread Index	20	E 84
Vertical Burn Test	5-V	UL 94
Foam Fire Test	Passed	UL 1975
Oil Canning	Passed	D 648
Dielectric Strength	112	D 149

Warranty:

One year limited warranty

L'AIR INTERNATIONAL