


L'AIR Quik-Base[®] Sport

VENTED WALL BASE MOULDING

06 65 00 - Plastic Trims

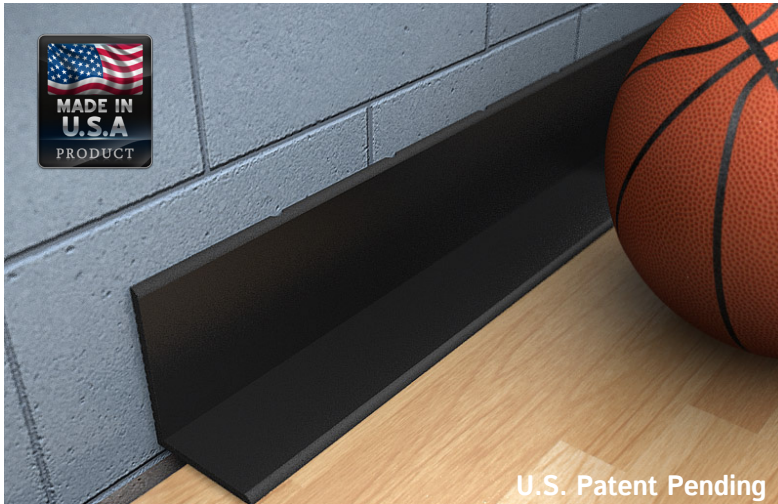

L'AIR Quik-Base vented wall base is specifically designed for all types of floating construction applications, featuring semi-circular vents along the back side of the wall base to insure proper air circulation under the floor, and permitting free expansion and contraction of the floor system.

- Light-weight & safer to handle
- Economical to ship
- Easily installed using minimal adhesive
- Cuts easily with no residue using standard tools
- Inside & outside corners available
- Compatible with L'AIR Avant & Contempo Base Mouldings
- 2 stock colors and 6 special orders below
- Custom color matching available for virtually any application



For more information, samples and pricing call 1.844.243.8574 or visit www.lairfloors.com

Product Specifications

Description:

A homogeneous composition of 100% foamed polyvinyl chloride (PVC), high quality additives, and colorants - produced in a smooth, durable matte finish. Quik-Base moldings feature a consistent density, impact resistance, and color, providing a uniform aesthetic.

Physical Characteristics:

1/4" thick x 4" high x 8'-0" long (2 lb12 oz)

1/4" thick x 3" long toe

Grooved back with vertical semi-circular vents

Performance & Technical Data:

PROPERTY	VALUE	ASTM
Density	0.70	D 792
Water Absorption	0.3	D 570
Tensile Strength	3000	D 638
Tensile Modulus	232,000	D 638
Flexural Strength	—	D 790
Flexural Modulus	—	D 790
Garner Impact	—	D 4228
Izod Impact Strength	0.53	D 256
Charpy Impact	8.1	D 256
Heat Deflection Temp	151	D 648
Coefficient of Expansion	4.0×10^{-5}	D 696
Thermal Conductivity	0.084	C 177
Burning Rate	Failed to ignite	D 635
Flame Spread Index	20	E 84
Vertical Burn Test	5-V	UL 94
Foam Fire Test	Passed	UL 1975
Oil Canning	Passed	D 648
Dielectric Strength	112	D 149

Warranty:

One year limited warranty

